


IP PTZ CAMERA - 2 MP



AD-IPCSD362IRA

- 36X Optional Zoom & 16X Digital Zoom
- IR Distance 120 Mtrs, AC24V
- With Wiper

- 1/2.8" Ambrella CMOS PTZ Camera
- 2 Mega Pixel (1080P) Full HD Resolution
- WDR, Ultra DNR, Smart IR, Auto IRIS, Auto Focus, BLC
- Audio In, Audio Out, Rs485, Rs232, Video Out
- IP66, Surge Proof, Light Proof Wave Proof
- 24 Volt

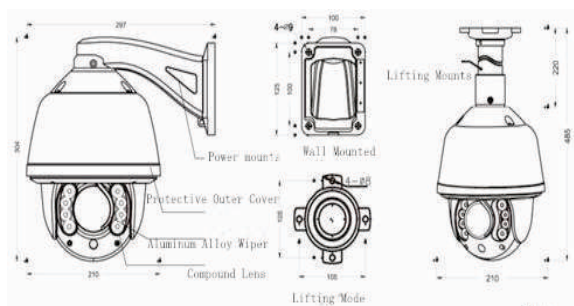

Specification

IP specification

Video coding	H.264 Main Profile MJPEG/JPEG
Output Bit Rate	32Kbps-16Mbps
Frame Rate	30fps(1920*1080), 30fps(1280*720)
Audio Standard	G.711
Information display	Dome title, Preset, scan mode, scan title, zone scan, Zoom value, coordinate, Alarm Date & Time
Data record	Video, image file
Alarm	E-mail, Explorer, Management Software
Protocol support	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, UPnP, ON VIF
Client browser	Windows Mobile Symbian Phone Android (PC, Mobile)

Mechanical Specification

Power Supply	AC-24V (adaptor not including)
Power consumption	38W
Surveillance Control	Manual Control/Time to start setting
Manual Speed	Pan: (0.°~360°/s) Tilt: (0.°~90°/s)
Preset Speed	220°/s
Rotation	Pan: 360° Continue rotation; Tilt: 90°(-10°~90°) With Auto-Flip
Focal length speed	Control Speed according to the length of Focal Auto adjustment
Auto Control	
Presets	255 presets Titles can be edited
Auto Flip	Tilt : 120°, Pan: 360°
Scan	256° (Optional Setting), 8 Scans
Display Zone	8 Programmable Zones with Titles
Temperature	-35~+55
Environment	
Humidity	0~95% (Non-Condensation)
Protection Grade	IP66, TV4000V Light-proof, Surge-Proof, Wave-Proof
Weight	Gross weight: 5.8KG (with wall bracket)

Zoom Camera Specification

Image Element	1/2.8 Mega Pixel CMOS
Effective Pixel	2 MEGA PIXEL
Image size	1920*1080, 1280*720, 720*480, 720*576
Lens	3.6-130mm
zoom	36X (optical), 16x (digital)
Angle of View	1080i mode: Wide 55.4°/ Tele 2.9° 720p mode: Wide 37.6°/ Tele 2.0°
Mini illumination	Color 0.2Lux@(F1.6, AGC ON) Black and white : 0.02Lux@(F1.6, AGC ON)
Sync system	Internal
Gain	Auto/ Manual
AE Control	Auto/ Manual, Priority mode(Shutter priority & Iris Priority) Bright, EV Compensation, Slaw AE
White Balance	Auto/ Manual
S/N ratio	≥50db
Backlight Compression	YES
Auto ICR	YES
Camera mode display	YES
Digital Output	YES
Interface	Female BNC Interface
WDR	ON/OFF/AUTO



CAMERA



COMPRESSION



PROTECTION



SD CARD
SUPPORT
(OPTIONAL)



LEDS



DAY NIGHT

IP CAMERA

ONVIF